




WALL ELEVATION OPPISITE SIDE


SCHEME

99 7 99

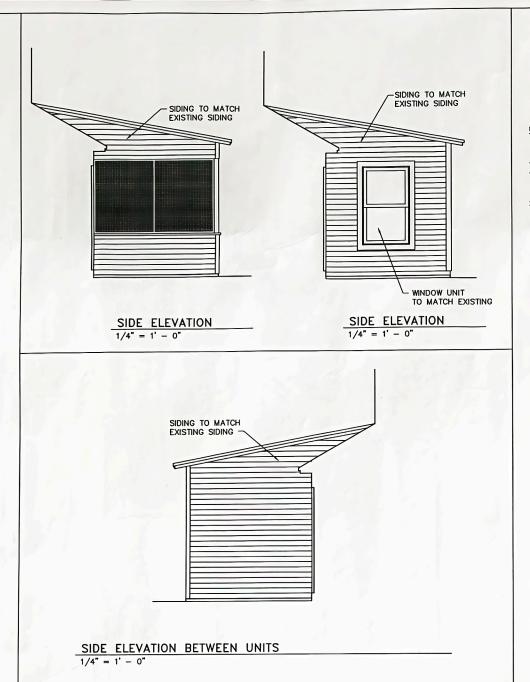

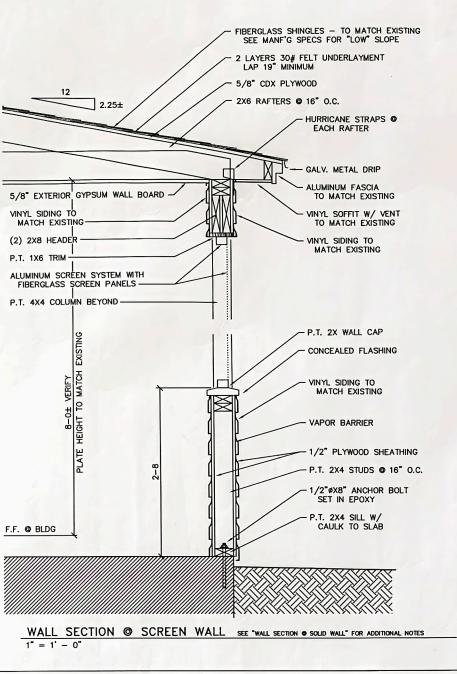

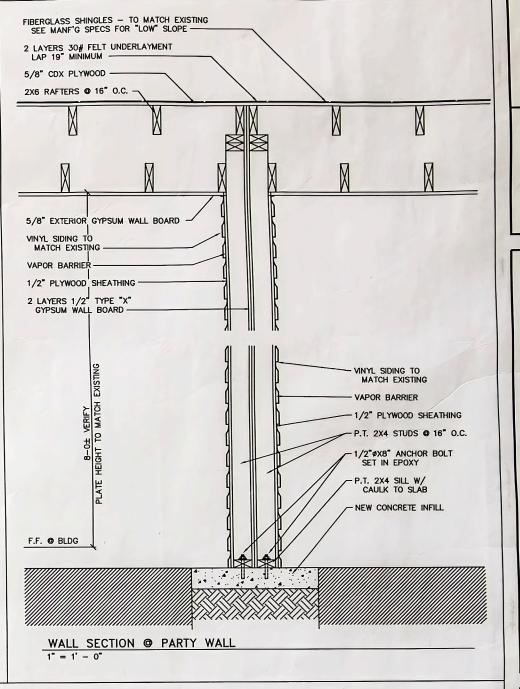




- PERMISSION SHALL BE OBTAINED FROM THE CONDO ASSOC. BEFORE PROCEEDING WITH ANY UNIT MODIFICATION.
- 2. A BUILDING PERMIT SHALL BE AQUIRED FROM GLYNN COUNTY BEFORE ANY WORK BEGINS. ALL CONSTRUCTION SHALL MEET APPLICABLE BUILDING CODES.
- 3. ALL WORK SHALL BE PERFORMED BY A QUALIFIED BUILDER. "DO-IT-YOURSELFERS" SHOULD SUBMIT REASONABLE PROOF OF CAPIBILITIES TO THE CONDO ASSOC.
- 4. ALL MATERIALS AND WORKMANSHIP SHALL BE EQUAL TO OR EXCEED THE EXISTING CONSTRUCTION.
- 5. WORK SHALL BE DONE DURING THE NORMAL WORKDAY TO MINIMIZE DISTURBANCE OF SURROUNDING RESIDENTS.
- 6. CONSTRUCTION MATERIAL SHALL BE STORED INSIDE THE UNIT OR ON THE PORCH. NO CONSTRUCTION DEBRIS SHALL BE ALLOWED TO ACCUMULATE OUTSIDE THE UNIT.
- 7. INTERIOR FINISHES ARE AT THE DISCRETION OF THE OWNER.
- 8. WINDOW AIR—CONDITIONERS AR ADDITIONAL CONDENSING UNITS ARE PROHIBITED.
- 9. ALL EXTERIOR WOOD SHALL BE PAINTED W/ MINIMUM OF TWO(2)
 COATS TO MATCH EXISTING TRIM. ALL EXTERIOR VINYL PRODUCTS
 SHALL MATCH EXISTING COLOR AND PROFILE. METAL DOORS SHALL
 BE PAINTED TO MATCH EXISTING FRONT DOOR COLOR.
- 10. EXTERIOR LIGHT FIXTURE TO BE BY "THOMAS" P5820 GLOBE LIGHT — 6" DIA. WHITE GLASS GLOBE — BLACK WALL BRACKET 60 WATT BULB.

ELECTRICAL SYMBOLS LEGEND

- DUPLEX CONVENIENCE OUTLET
- WP DUPLEX OUTLET WATERPROOF
- \$ \$ switch
- → WALL MOUNT LIGHT

FRAMING NOTES :

- 1. ALL WALL FRAMING SHALL BE P.T. NO. 2 PINE ${\sf Fb}$ = 1350 PSI UNLESS OTHERWISE NOTED.
- 2. ALL ROOF/CLG FRAMING SHALL BE NO. 2 PINE Fb = 1350 PSI UNLESS OTHERWISE NOTED.
- RAFTERS SHALL BE 2x6's AT 16" O.C. MAX. UNBRACED HORIZONTAL SPAN 13'-6"
- 4. MINIMUM HEADER SIZE SHALL BE 2-2x6's
- 5. CEILING JOISTS SHALL BE 2x6's AT 16" O.C. MAX. SPAN 12'-9"

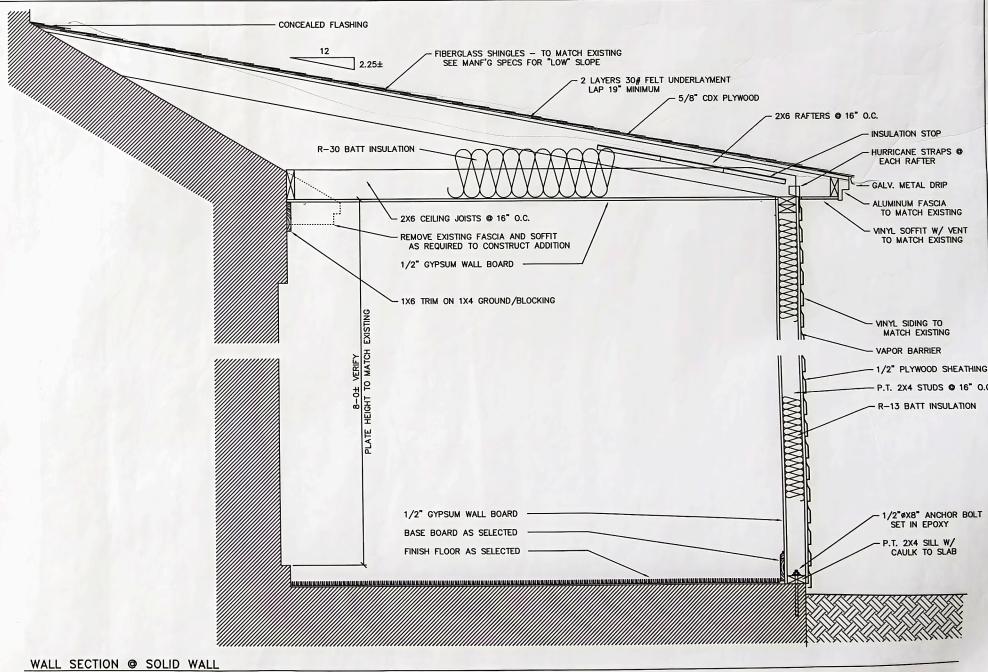

PORCH ENCLOSURES FOR:

| Columbia | Columbia

9-19-95

2-29-96

4-17-96

0

ARCHITECTS

/RUL

SERY,

ISLAND, GEORGIA 315

1804-A SIMONS I